



NXP® ICODE® SLIX NFC Label

SKU:	RS-SLX-PET3M-1818
Chip Type:	NXP® ICODE® SLIX
Frequency:	HF 13.56 MHz
TID Memory:	64 bytes
User Memory:	896 bytes
Protocol:	ISO/IEC 15693, ISO/IEC 18000-3M1, NFC Forum Type 5
Read Range:	Up to 1.5 m
Certificate:	WEEE compliant
Industry:	Retail, Events
Applications:	Document Management, Library, Social Engagement, NFC, Warehouse




Enhance your tracking precision with our ultra-compact NFC label, measuring just 18×18mm and featuring the high-performance NXP® ICODE® SLIX chip. Compliant with ISO/IEC 15693 and NFC Forum Type 5 standards, this small yet powerful label ensures exceptional read/write capabilities, making it ideal for precise tracking applications.

Crafted from durable PET material and backed by reliable 3M adhesive, this label offers superior durability and stability. Whether for logistics management, asset tracking, or other applications, it provides top-tier quality and efficient tracking solutions.

Physical Information	Material	PET & 3M adhesive
	Label Size	18×18 mm
	Antenna Size	15×15 mm
	Operating Environment	-20°C~+50°C, 20%~80% RH
	Storage Environment	+18°C~+28°C, 40%~60% RH
	Mounting Method	Stick
	Certificate	WEEE compliant
	Surface	Plastic, Paper Carton, Wood
	Handling Precautions	1. Do not bend. 2. Keep away from water and collision. 3. Labels with black-dot marks are bad ones, do not use.

Technical Information	Operating Frequency	13.56 MHz
	Communication Protocol	ISO/IEC 15693, ISO/IEC 18000-3M1, NFC Forum Type 5
	Read Range	Up to 1.5 m
	Chip Type	NXP® ICODE® SLIX
	User Memory	896 bytes
	UID Memory	64 bytes
	Security Features	32-bit protected EAS and AFI functionality

Packing Information	Packing Format	Packed in roll, vacuummed packing in ESD bag
	Roll OD	Max. 203.2 mm
	Core ID	3 inch(76.2 ± 0.50 mm)
	Packing Quantity	1000 pcs/roll, per roll 0.29 kg

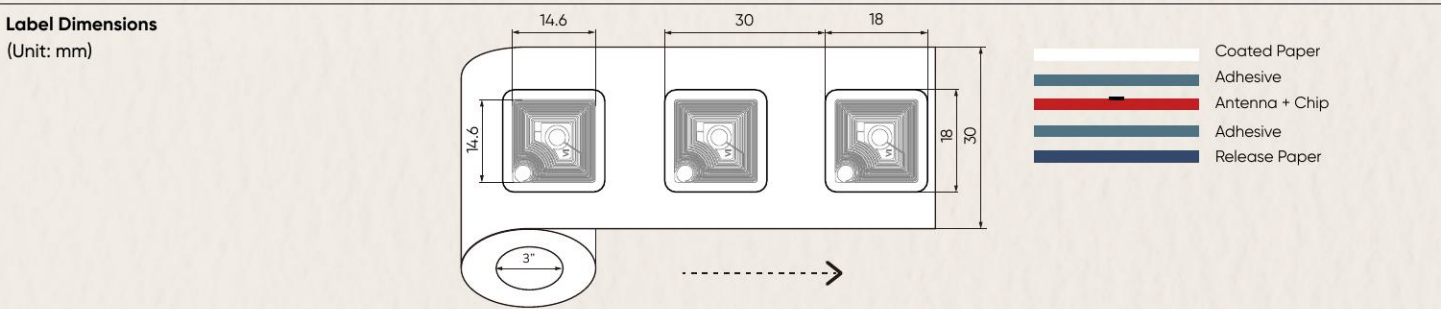

● **Performance and Illustrations:** Graphs and visuals are for reference only; actual product performance may vary depending on usage and environment.
 ● **Storage and Handling Guidelines:** Follow standard ESD-safe storage and handling procedures to maintain product integrity and avoid damage.
 ● **Product Updates and Revisions:** rfidbridge.com may change products, specs, or services at any time without prior notice.
 ● **General Use Disclaimer:** Products are for general-purpose use and not intended for safety-critical or life-support applications.
 ● **Legal Notice:** Information is believed accurate but may change. rfidbridge.com is not liable for use-related issues or outcomes.