



Impinj® Monza® R6-P UHF RFID Label

SKU: RS-R6P-PP-9622

Chip Type: Impinj® Monza® R6-P

Frequency: UHF 860-960 MHz

EPC Memory: 128 bits/96 bits

User Memory: 32 bits/64 bits

Protocol: ISO/IEC 18000-63,
EPCglobal Gen2v2

Industry: Apparel, Electronics, Cosmetics,
Pharmaceuticals, Jewelry,
Supply Chain Management,
Logistics, Inventory Management,
Production Line Surveillance

Applications: Asset Tracking, Enhanced Privacy,
Loss Prevention, Brand Protection




The 96×22 mm UHF RFID label with Monza® R6-P RAIN RFID tag chip offering professional read performance and data integrity. Compliant with ISO/IEC 18000-63 and EPCglobal Gen2v2 standards, it can smoothly implement in various environments with its AutoTune functionality. It enhances the asset and inventory management and improve the operational efficiency.

Professional in serializing items and loss protection, this label is widely used in supply chain management, logistics, inventory management, production line surveillance and asset tracking. It ensures about the lowest applied tag cost with unmatched read efficiency, data integrity and encoding performance.

Physical Information	Material	PP Synthetic Paper
	Label Size	96×22 mm
	Antenna Size	92×18 mm
	Operating Environment	-40°C~+70°C, 20%~90% RH
	Storage Environment	+18°C~+28°C, 40%~60% RH
	Mounting Method	Stick
	Surface	Paper Carton, Plastic, Wood
	Handling Precautions	1. Do not bend. 2. Keep away from water and collision. 3. Labels with black-dot marks are bad ones, do not use.

Technical Information	Operating Frequency	860~960MHz
	Communication Protocol	ISO/IEC 18000-63, EPCglobal Gen2v2
	Operating Mode	Passive
	Encoding	9,500 tags/minute
	Chip Type	Impinj® Monza® R6-P
	User Memory	32 bits/64 bits
	EPC Memory	128 bits/96 bits
	Tag Data Protection Features	Access/Kill Short-range mode
	High-Speed Reading	Support
	Read Redundancy Prevention	Support
	Common Criteria Certification	WEEE compliant

Packing Information	Packing Format	Packed in roll, vacuumed packing in ESD bag.
	Roll OD	Max. 203 mm
	Core ID	3 inch(76.2 ± 0.50 mm)
	Packing Quantity	1000 pcs/roll, single roll weight 1.07 kg

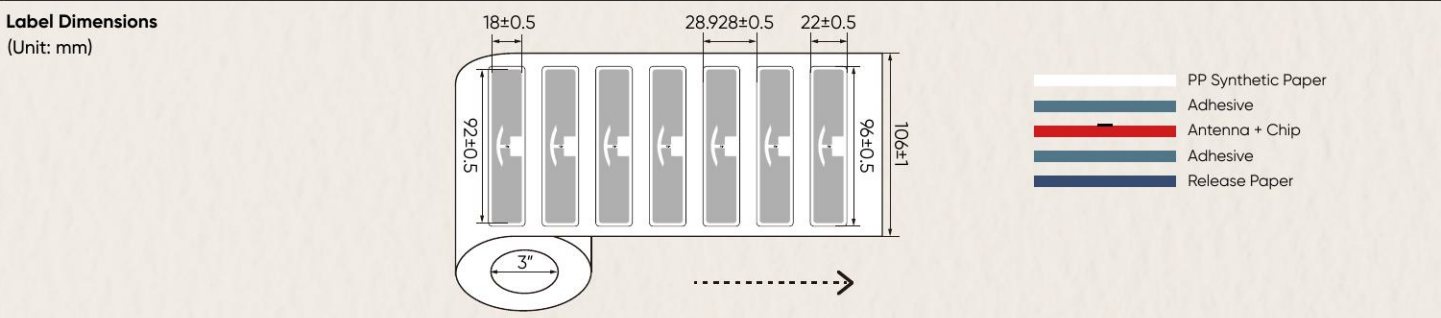

● **Performance and Illustrations:** Graphs and visuals are for reference only; actual product performance may vary depending on usage and environment.
 ● **Storage and Handling Guidelines:** Follow standard ESD-safe storage and handling procedures to maintain product integrity and avoid damage.
 ● **Product Updates and Revisions** rfidbridge.com may change products, specs, or services at any time without prior notice.
 ● **General Use Disclaimer:** Products are for general-purpose use and not intended for safety-critical or life-support applications.
 ● **Legal Notice:** Information is believed accurate but may change rfidbridge.com s not liable for use-related issues or outcomes.