


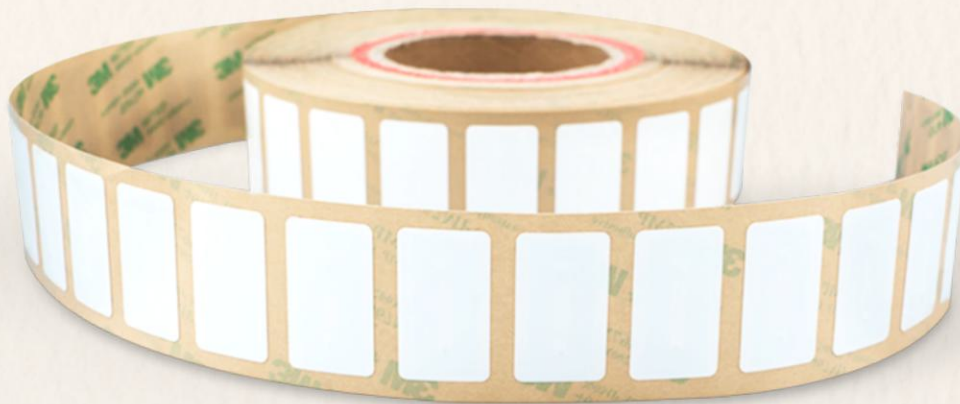

NXP® ICODE® SLIX2 NFC Label

SKU: RS-SLX2-PET3M-3520

Chip Type: NXP® ICODE® SLIX2

Frequency: HF 13.56 MHz

TID Memory: 64 bytes

User Memory: 320 bytes

Protocol: ISO/IEC 15693,
ISO/IEC 18000-3M1,
NFC Forum Type 5

Read Range: Up to 1.5 m

Certificate: WEEE compliant

Industry: Retail, Events

Applications: Document Management,
Library, Social Engagement,
NFC, Warehouse




Engineered for precision, our 35×20mm NFC label features the advanced NXP® ICODE® SLIX2 chip, complying with ISO/IEC 15693 and NFC Forum Type 5 standards. With fast read/write speeds, this label ensures efficient data exchange and reliable performance in various NFC applications.

Built for durability, the label is equipped with a strong 3M adhesive backing, allowing for seamless integration in both robust and high-frequency communication environments. Its technical excellence makes it an essential choice for projects requiring reliable and efficient NFC solutions.

Physical Information	Material	PET & 3M adhesive
	Label Size	35×20 mm
	Antenna Size	32×14 mm
	Operating Environment	-20°C~+50°C, 20%~80% RH
	Storage Environment	+18°C~+28°C, 40%~60% RH
	Mounting Method	Stick
	Certificate	WEEE compliant
	Surface	Plastic, Paper Carton, Wood
	Handling Precautions	1. Do not bend. 2. Keep away from water and collision. 3. Labels with black-dot marks are bad ones, do not use.

Technical Information	Operating Frequency	13.56 MHz
	Communication Protocol	ISO/IEC 15693, ISO/IEC 18000-3M1, NFC Forum Type 5
	Read Range	Up to 1.5 m
	Chip Type	NXP® ICODE® SLIX2
	User Memory	320 bytes
	UID Memory	64 bytes
	Security Features	32-bit protected EAS and AFI functionality

Packing Information	Packing Format	Packed in roll, vacuumed packing in ESD bag
	Roll OD	Max. 152 mm
	Core ID	3 inch(76.2 ± 0.50 mm)
	Packing Quantity	1000 pcs/roll, per roll 0.5 kg

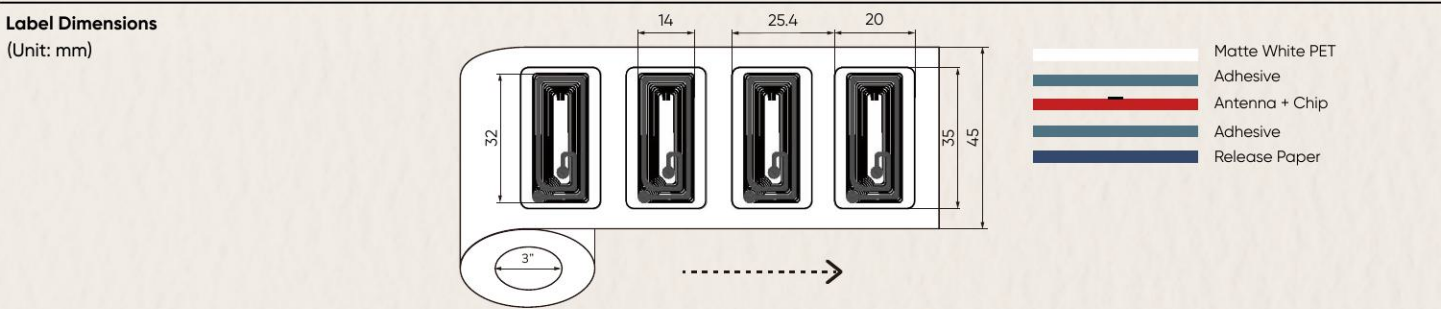

● **Performance and Illustrations:** Graphs and visuals are for reference only; actual product performance may vary depending on usage and environment.
 ● **Storage and Handling Guidelines:** Follow standard ESD-safe storage and handling procedures to maintain product integrity and avoid damage.
 ● **Product Updates and Revisions:** rfidbridge.com may change products, specs, or services at any time without prior notice.
 ● **General Use Disclaimer:** Products are for general-purpose use and not intended for safety-critical or life-support applications.
 ● **Legal Notice:** Information is believed accurate but may change. rfidbridge.com is not liable for use-related issues or outcomes.