




NXP® NTAG® 213 ABS and Nylon RFID Cable Tie Tag

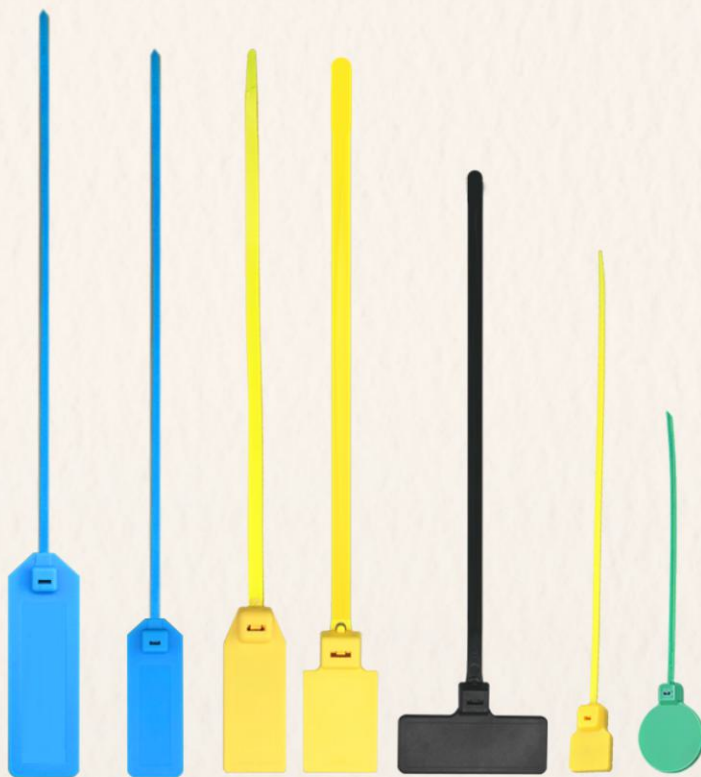

SKU:	RSCT-N213-AN
Chip Type:	NXP® NTAG® 213
Frequency:	HF 13.56 MHz
User Memory:	144 bytes
Read Range:	Up to 10 cm
Protocol:	ISO/IEC 14443-A, NFC Forum Type 2
Industry:	Apparel and Fashion, Retail
Applications:	Warehouse, Gaming and Toys

The NXP® NTAG® 213 ABS & Nylon HF RFID Cable Tie Tag combines durability with versatile functionality. Built for high-speed data transmission and strong anti-collision performance, it ensures reliable and quick scans in demanding environments such as logistics, warehouses, or retail operations.

Designed with a tamper-evident feature, this tag provides secure bundling for cables, pipes, and assets. Its robust construction facilitates organized and traceable asset management, making it an ideal solution for both tracking and securing valuable items in complex operations.

Physical Information

Material	ABS & Nylon						
Model No.	AN-8828	AN-6824	AN-6826	AN-7530	AN-1912	AN-D28	AN-5630
Tag Size(mm)	88×28	68×24	68×26	75×30	19×12	Ø28	56×30
Cable Tie Length(mm)	292	292	287	255	153	145	290
Tag Type	Disposable	Disposable	Reusable	Reusable	Disposable	Disposable	Reusable
Weight	9 g	7 g	7.5 g	11 g	1 g	2 g	9 g
Operating Environment	-35°C~+85°C						
Storage Environment	+18°C~+28°C, 40%~60% RH						
Color	Red/Yellow/Blue/Black/White						
Mounting Method	Tie onto objects						
Surface	Plastic, Wood						
Handling Precautions	Ensure the RFID cable tie tag is securely attached to avoid accidental detachment.						


Technical Information

Operating Frequency	HF 13.56 MHz
Communication Protocol	ISO/IEC 14443-A, NFC Forum Type 2
Read Range	Up to 10 cm
Chip Type	NXP® NTAG® 213
User Memory	144 bytes
Security Features	Configurable password protection with an optional limit of unsuccessful attempts Anti-tearing support for capability container (CC) and lock bits ECC supported originality check


Size and Specification Drawing

(Unit: mm)


(1) Model No. AN-8828 (Disposable)

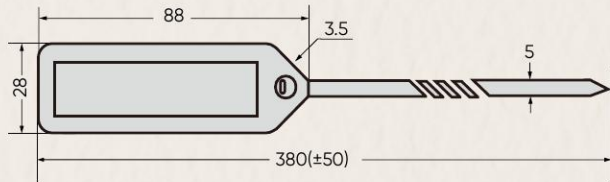


(2) Model No. AN-6824 (Disposable)

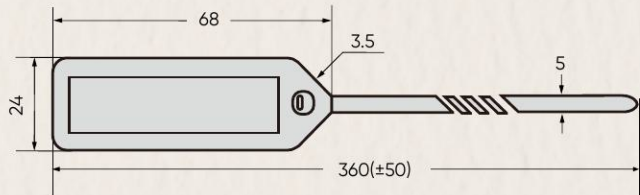


(3) Model No. AN-6826 (Reusable)

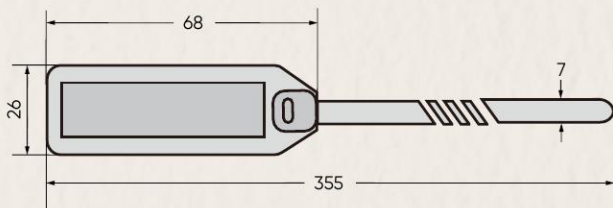


(4) Model No. AN-7530 (Reusable)

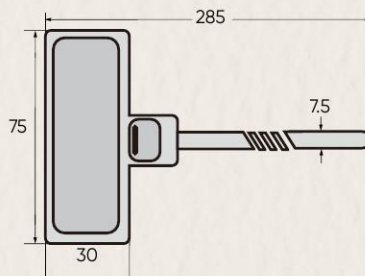


(5) Model No. AN-1912 (Disposable)

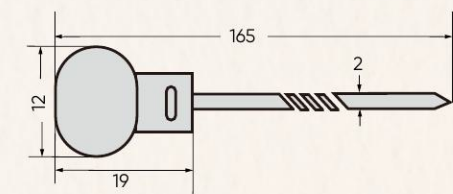

(6) Model No. AN-D28 (Disposable)

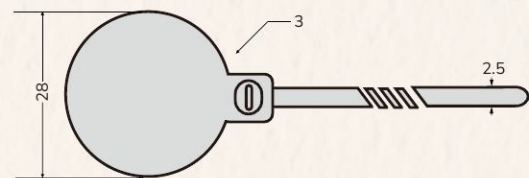

(7) Model No. AN-5630 (Reusable)

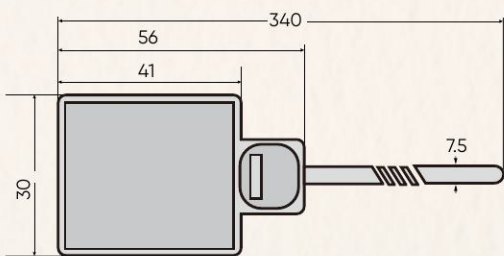

● **Performance and Illustrations:** Graphs and visuals are for reference only; actual product performance may vary depending on usage and environment. ● **Storage and Handling Guidelines:** Follow standard ESD-safe storage and handling procedures to maintain product integrity and avoid damage. ● **Product Updates and Revisions:** rfidbridge.com may change products, specs, or services at any time without prior notice. ● **General Use Disclaimer:** Products are for general-purpose use and not intended for safety-critical or life-support applications. ● **Legal Notice:** Information is believed accurate but may change rfidbridge.com is not liable for use-related issues or outcomes.