



NXP® ICODE® SLIX CD Type NFC Label



SKU: RS-SLX-CP-D4016CD

Chip Type: NXP® ICODE® SLIX

Frequency Band: HF 13.56 MHz

Protocol: ISO/IEC 15693,
ISO/IEC 18000-3M1,
NFC Forum Type 5

User Memory: 896 bytes

UID Memory: 64 bytes

Read Range: Up to 1.5 m

Certificate: WEEE Compliant

Industry: Retail, Events

Applications: Document Management, Library,
Social Engagement, NFC, Warehouse



Enhance your CD management with our CD Type RFID Label, equipped with advanced NXP® ICODE® SLIX technology. Conforming to ISO/IEC 15693 and NFC Forum Type 5 standards, this label is designed with precision, featuring an outer diameter of Ø40 mm and an inner diameter of Ø16 mm, making it a perfect fit for your CDs.


This RFID solution optimizes inventory tracking, enabling faster, more efficient check-outs. With its reliable performance and seamless integration, it's an ideal choice for improving operational efficiency and streamlining your CD's management processes.

Physical Information	Material	Coated Paper
	Label Size	Ø40 mm
	Antenna Size	Ø34 mm
	Inner Diameter Hole Size	Ø16 mm
	Certificate	WEEE Compliant
	Operating Environment	-20°C~+50°C, 20%~80% RH
	Storage Environment	+18°C~+28°C, 40%~60% RH
	Mounting Method	Stick
	Surface	Paper carton, Plastic, Wood
	Handling Precautions	1. Do not bend. 2. Keep away from water and collision. 3. Labels with black-dot marks are bad ones, do not use.

Technical Information	Operating Frequency	13.56 MHz
	Protocol	ISO/IEC 15693, ISO/IEC 18000-3M1, NFC Forum Type 5
	Chip Type	NXP® ICODE® SLIX
	Read Range	Up to 1.5 m
	User Memory	896 bytes
	UID Memory	64 bytes
	Security Features	32-bit protected EAS and AFI functionality

Packaging Information	Packing Format	Packed in roll, vacuumed packing in ESD bag
	Roll OD	Max.180 mm
	Core ID	3 inch(76.2 ± 0.50 mm)
	Packing Quantity	1000 Pcs/roll, per roll 0.52 kg

Label Dimensions (Unit: mm)

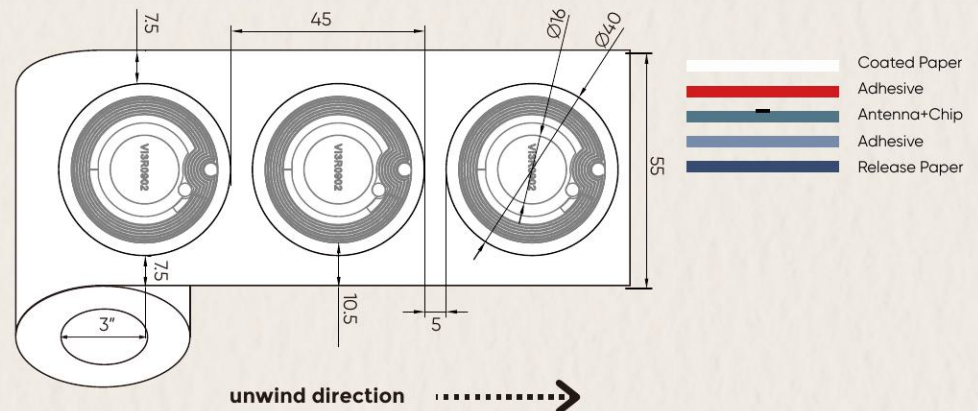

● **Performance and Illustrations:** Graphs and visuals are for reference only; actual product performance may vary depending on usage and environment. ● **Storage and Handling Guidelines:** Follow standard ESD-safe storage and handling procedures to maintain product integrity and avoid damage. ● **Product Updates and Revisions:** [rfidbridge.com](https://www.rfidbridge.com) may change products, specs, or services at any time without prior notice. ● **General Use Disclaimer:** Products are for general-purpose use and not intended for safety-critical or life-support applications. ● **Legal Notice:** Information is believed accurate but may change [rfidbridge.com](https://www.rfidbridge.com) is not liable for use-related issues or outcomes.