



NXP® ICODE® SLIX NFC Label

SKU:	RS-SLIX-CP-10025
Chip Type:	NXP® ICODE® SLIX
Frequency Band:	HF 13.56 MHz
Protocol:	ISO/IEC 15693, ISO/IEC 18000-3M1, NFC Forum Type 5
User Memory:	896 bytes
UID Memory:	64 bytes
Read Range:	Up to 1.5 m
Certificate:	WEEE Compliant
Industry:	Retail, Events
Applications:	Document Management, Library, Social Engagement, NFC, Warehouse



This NFC label measures 100x25 mm and is designed for ICODE® SLIX. It complies with ISO/IEC 15693 and ISO/IEC 18000-3M1 specifications, ensuring high-performance and reliability for a variety of applications.


The ICODE® series also meets the NFC Forum Type 5 standard, making it compatible with a wide range of NFC-enabled devices and offering enhanced interoperability.

Physical Information	Material	Coated Paper
	Label Size	100×25 mm
	Antenna Size	60×15 mm
	Operating Environment	-20°C~+50°C, 20%~80% RH
	Storage Environment	+18°C~+28°C, 40%~60% RH
	Mounting Method	Stick
	Surface	Paper carton, Plastic, Wood
	Certificate	WEEE Compliant
	Handling Precautions	1. Do not bend. 2. Keep away from water and collision. 3. Labels with black-dot marks are bad ones, do not use.

Technical Information	Operating Frequency	13.56 MHz
	Protocol	ISO/IEC 15693, ISO/IEC 18000-3M1, NFC Forum Type 5
	Chip Type	NXP® ICODE® SLIX
	Read Range	Up to 1.5 m
	User Memory	896 bytes
	UID Memory	64 bytes
	Security Features	32-bit protected EAS and AFI functionality

Packaging Information	Packing Format	Packed in roll, vacuumed packing in ESD bag
	Roll OD	Max.203 mm
	Core ID	3 inch(76.2 ± 0.50 mm)
	Packing Quantity	1000 Pcs/roll, per roll 0.8 kg

Label Dimensions
(Unit: mm)

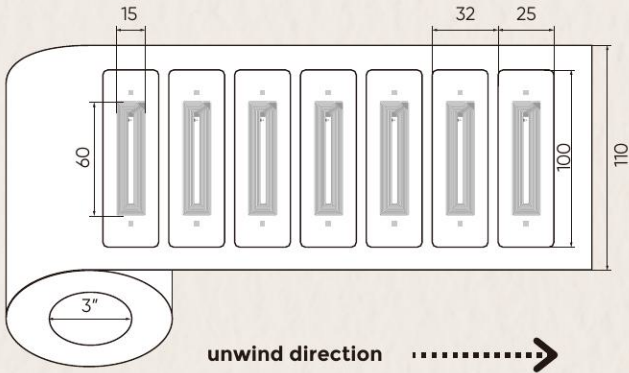

● **Performance and Illustrations:** Graphs and visuals are for reference only; actual product performance may vary depending on usage and environment.
 ● **Storage and Handling Guidelines:** Follow standard ESD-safe storage and handling procedures to maintain product integrity and avoid damage.
 ● **Product Updates and Revisions:** rfidbridge.com may change products, specs, or services at any time without prior notice.
 ● **General Use Disclaimer:** Products are for general-purpose use and not intended for safety-critical or life-support applications.
 ● **Legal Notice:** Information is believed accurate but may change. rfidbridge.com is not liable for use-related issues or outcomes.