



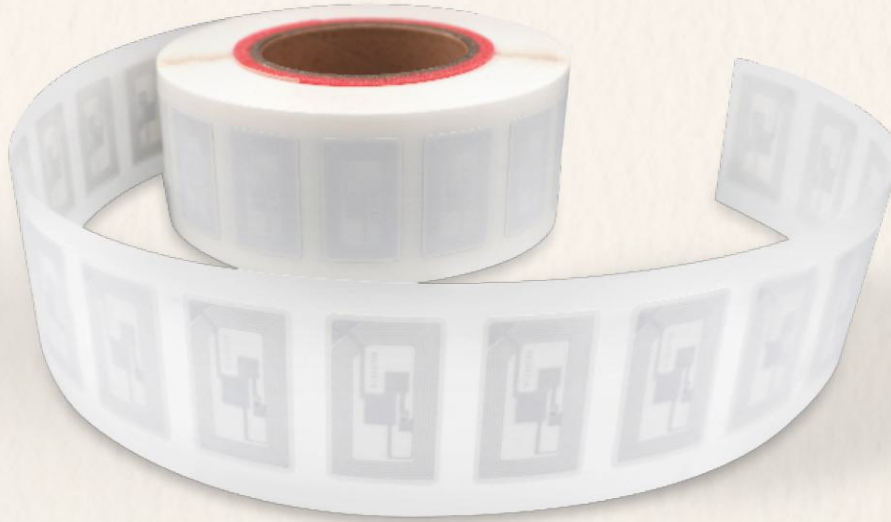

NXP® ICODE® SLIX NFC Label

SKU:	RS-SLX-CP-4025
Chip Type:	NXP® ICODE® SLIX
Frequency Band:	HF 13.56 MHz
Protocol:	ISO/IEC 15693, ISO/IEC 18000-3M1, NFC Forum Type 5
User Memory:	896 bytes
UID Memory:	64 bytes
Read Range:	Up to 1.5 m
Certificate:	WEEE Compliant
Industry:	Retail, Events
Applications:	Document Management, Library, Social Engagement, NFC, Warehouse



Our NFC labels, measuring 40×25 mm, are equipped with the advanced NXP ICODE® SLIX chip. Compliant with ISO/IEC 15693, ISO/IEC 18000-3M1, and NFC Forum Type 5 standards, these labels offer reliable and precise communication for seamless asset management.


Trusted by libraries and a variety of industries, our RFID labels provide efficient and accurate tracking solutions. Whether for inventory control or asset management, they are the preferred choice for organizations seeking to streamline their operations.

Physical Information	Material	Coated Paper
	Label Size	40×25 mm
	Antenna Size	37×22 mm
	Operating Environment	-20°C~+50°C, 20%~80% RH
	Storage Environment	+18°C~+28°C, 40%~60% RH
	Mounting Method	Stick
	Surface	Paper carton, Plastic, Wood
	Certificate	WEEE Compliant
	Handling Precautions	1. Do not bend. 2. Keep away from water and collision. 3. Labels with black-dot marks are bad ones, do not use.

Technical Information	Operating Frequency	13.56 MHz
	Protocol	ISO/IEC 15693, ISO/IEC 18000-3M1, NFC Forum Type 5
	Chip Type	NXP® ICODE® SLIX
	Read Range	Up to 1.5 m
	User Memory	896 bytes
	UID Memory	64 bytes
	Security Features	32-bit protected EAS and AFI functionality

Packaging Information	Packing Format	Packed in roll, vacuumed packing in ESD bag
	Roll OD	Max.230 mm
	Core ID	3 inch(76.2 ± 0.50 mm)
	Packing Quantity	1000 Pcs/roll, per roll 0.44 kg

Label Dimensions
(Unit: mm)

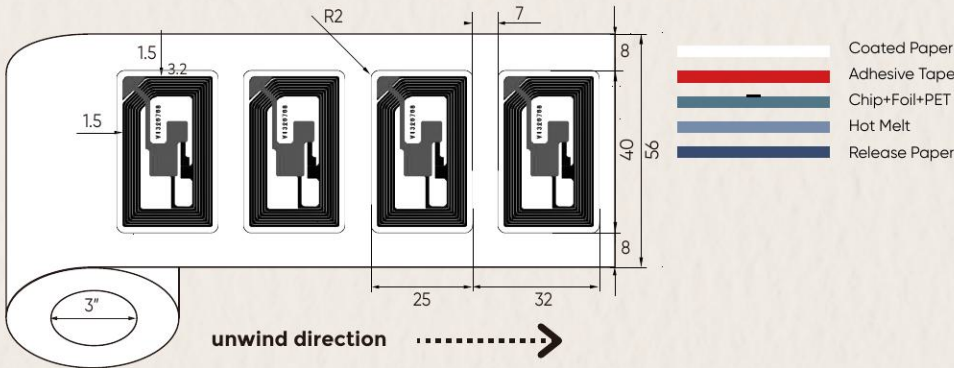

● **Performance and Illustrations:** Graphs and visuals are for reference only; actual product performance may vary depending on usage and environment. ● **Storage and Handling Guidelines:** Follow standard ESD-safe storage and handling procedures to maintain product integrity and avoid damage. ● **Product Updates and Revisions:** rfidbridge.com may change products, specs, or services at any time without prior notice. ● **General Use Disclaimer:** Products are for general-purpose use and not intended for safety-critical or life-support applications. ● **Legal Notice:** Information is believed accurate but may change rfidbridge.com s not liable for use-related issues or outcomes.