



NXP® NTAG® 213 Heat Resistant RFID Tag



SKU:	RS-N213-PPS-D30
Chip Type:	NXP® NTAG® 213
Frequency:	HF 13.56 MHz
Protocol:	ISO/IEC 14443-A, NFC Forum Type 2
User Memory:	144 bytes
EEPROM:	180 bytes
Operating Distance:	Up to 10 cm
Industry:	Hospitality, Education, Laboratory, Public Transportation
Applications:	Hotel Management, Product Management, Personnel Management

The NXP® NTAG® 213 Tag is made from high-temperature-resistant PPS material and utilizes a double-sided PPS encapsulation process. It delivers reliable protection with its waterproof, shock-resistant, moisture-proof, and high-temperature-resistant properties.


The NXP® NTAG® 213 tag features a versatile surface that supports direct silk-screen and pad printing, as well as inkjet coding or laser engraving, and can be applied to hotel management, product management, and personnel management.

Physical Information	Material	PPS
	Tag Size	Ø30 mm
	Thickness	3 mm
	Operating Environment	-25°C~+220°C
	Storage Environment	-30°C~+220°C
	Mounting Method	Stick
	Handling Precautions	1. Do not bend. 2. Keep away from water and collision. 3. Tags with black-dot marks are bad ones, do not use.

Technical Information	Operating Frequency	13.56 MHz
	Protocol	ISO/IEC 14443-A, NFC Forum Type 2
	Chip Type	NXP® NTAG® 213
	Read Range	Up to 10 cm
	EEPROM	180 bytes
	User Memory	144 bytes
	UID Memory	7 bytes
	Anti-Collision	Support
	Data Transfer	106 kbit/s
	Security Features	32-bit password

Packaging Information	Packing Format	Packed in roll, vacuumed packing in ESD bag
	Packing Quantity	200 pcs/bag, 2000 pcs/carton

Label Dimensions
(Unit: mm)

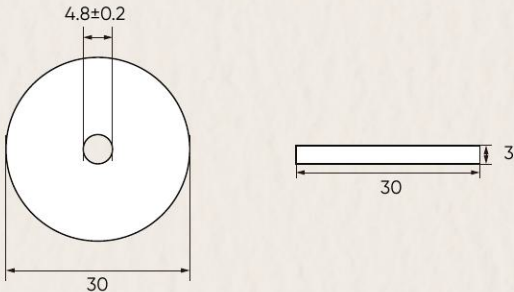

● **Performance and Illustrations:** Graphs and visuals are for reference only; actual product performance may vary depending on usage and environment.
 ● **Storage and Handling Guidelines:** Follow standard ESD-safe storage and handling procedures to maintain product integrity and avoid damage.
 ● **Product Updates and Revisions:** rfidbridge.com may change products, specs, or services at any time without prior notice.
 ● **General Use Disclaimer:** Products are for general-purpose use and not intended for safety-critical or life-support applications.
 ● **Legal Notice:** Information is believed accurate but may change. rfidbridge.com is not liable for use-related issues or outcomes.